



agrimono
first choice



agrimono
first choice





Mini Vertical FEED MIXER

Standart PTO Drive
Manuel Discharge Door

OPTIONS

- Self hydraulic option
- Hydraulic Rear Loader Option
- Hydraulic Discharge Door Option
- Electric Motor Option
- Weighing System Option



Mini Vertical Feed Mixer Technical Properties

MODEL	AGM 1.2	AGM 1.7	AGM 2.2	AGM 3.0	AGM 3.5
Capacity	1.2 m ³	1.7 m ³	2.2 m ³	3.0 m ³	3.5 m ³
Lenght	1250 mm	1500 mm	1800 mm	3500 mm	3500 mm
Height	1500 mm	1770 mm	1800 mm	1900 mm	2000 mm
Width	1250 mm	1500 mm	1500 mm	1600 mm	1700 mm
Weight	400 Kg	650 Kg	850 Kg	1200 Kg	1400 Kg
Electric Motor	380 Volt/3 Phase 4 Kw-5 Hp	380 Volt/3 Phase 5.5 Kw-7 Hp	380Volt/3 Phase7.5Kw-10Hp	380Volt/3 Phase 11 Kw-15 Hp	380 Volt/3Phase 11 Kw-15 Hp
Electric Motor Brand	Volt/Local	Volt/Local	Volt / Local	Volt/Local	Volt/ Local
Electric Motor Tranmission	By V Belt	By V Belt	By V Belt	By V Belt	By V Belt
Gearbox	Local	Local	Local	Local	Local
Bottom Metal Tickness	8 mm	8 mm	10 mm	12 mm	12 mm
Bottom Side Metal Ticknes	6 mm	6 mm	8 mm	8 mm	8 mm
Side Metal Tickness	4 mm	4 mm	4 mm	4 mm	5 mm
Auger Type	Vertical	Vertical	Vertical	Vertical	Vertical
Auger Quantity	1 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Blade Quantity	5 Pieces	5 Pieces	5 Pieces	6 Pieces	6 Pieces
Hydraulic Unit (Option)	Without	Without	Self Hydraulic	Self Hydraulic	Self Hydraulic
Hydraulic Action	Without	Without	Command	Command	Command
Discharging (Option)	Manuel	Manuel	From Right Side	From Right Side	From Right Side
Discharging Door Lenght	60 Cm	60 Cm	60 Cm	70 Cm	70 Cm
Wheels Quantity	Without	Without	2 Pieces	2 Pieces	2 Pieces
Chassis	Fixed on Feet	Fixed on Feet	Fixed on Feet	Fixed on Feet	Fixed on Feet
Back Loader Bucket	Without	Without	(Option)	(Option)	(Option)
Shaft (Kardan)	Include	Include	Include	Include	Include



Mini TMR Mixers are designed to fulfill Mixing needs for small quantity cattles in your farm. Mixing feed has advantages for both the farmer and livestock, as uniformly mixed feed components provide better nutrition, improved feed efficiency and cost, and the opportunity to reduce wastage.



Electrical Vertical MINI FEED MIXER

Standart PTO Drive
Manuel Discharge Door

OPTIONS

Self hydraulic option
Hydraulic Rear Loader Option
Hydraulic Discharge Door Option
Electric Motor Option
Weighing System Option



Electrical Vertical Feed Mixer Technical Properties

MODEL	AGM 3.5	AGM 1.0	AGM 1.2	AGM 1.7	AGM 2.2	AGM 3
Capacity	3.5 m ³	1.0 m ³	1.2 m ³	1.7 m ³	2.2 m ³	3.0 m ³
Lenght	2500 mm	850 mm	1400 mm	1500 mm	1700 mm	2200 mm
Height	2400 mm	1200 mm	1600 mm	1800 mm	1900 mm	2200 mm
Width	1900 mm	1000 mm	1100 mm	1300 mm	1400 mm	1900 mm
Weight	1100 Kg	270 Kg	400 Kg	650 Kg	850 Kg	1000 Kg
Electric Motor	380 Volt / 3 Phase 11 Kw - 15 Hp	220 Volt / 380 Volt 3 Kw - 4 Hp	380 Volt / 3 Phase 4 Kw - 5 Hp	380 Volt / 3 Phase 5.5 Kw - 7 Hp	380 Volt / 3 Phase 7.5 Kw - 10 Hp	380 Volt / 3 Phase 11 Kw - 15 Hp
Electric Motor Brand	Volt / Local	Volt / Local	Volt / Local	Volt / Local	Volt / Local	Volt / Local
Electric Motor Transmission	By V Belt	Reducer	By V Belt	By V Belt	By V Belt	By V Belt
Transmission	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox	Gearbox
Bottom Metal Tickness	12 mm	6 mm	8 mm	8 mm	10 mm	12 mm
Side Metal Tickness	5 mm	3 mm	4 mm	4 mm	4 mm	4 mm
Auger Type	Vertical	Vertical	Vertical	Vertical	Vertical	Vertical
Auger Quantity	1 Piece	0 Piece	1 Piece	1 Piece	1 Piece	1 Piece
Blade Quantity	7 Pieces	5 Pieces	6 Pieces	6 Pieces	6 Pieces	7 Pieces
Hydraulic Unit (Option)	Option	Without	Without	Without	Option	Option
Hydraulic Action	Command	Without	Without	Without	Command	Command
Discharging (Option)	From Right Side	Manuel	Manuel	Manuel	From Right Side	From Right Side
Discharging Door Lenght	70 Cm	50 Cm	60 Cm	60 Cm	70 Cm	70 Cm
Chassis	Fixed on Feet	Fixed on Feet	Fixed on Feet	Fixed on Feet	Fixed on Feet	Fixed on Feet
Back Loader Bucket	(Option)	Without	Without	(Option)	(Option)	(Option)
Shaft (Kardan)	Include	Without	Include	Include	Include	Include



Mini TMR Mixers are designed to fulfill Mixing needs for small quantity cattles in your farm. Mixing feed has advantages for both the farmer and livestock, as uniformly mixed feed components provide better nutrition, improved feed efficiency and cost, and the opportunity to reduce wastage.



Single Vertical AUGER FEED MIXER

Electric Motor
+
Tractor PTO



Single Vertical Auger Feed Mixer Technical Properties

MODEL	AGM 3	AGM4	AGM6	AGM8	AGM10	AGM12
Capacity	3 m ³	4 m ³	6 m ³	8 m ³	10 m ³	12 m ³
Length	3500 mm	3700 mm	4000 mm	4400 mm	4500 mm	4800 mm
Height	2100 mm	2400 mm	2400 mm	2500 mm	2600 mm	2600 mm
Width	1700 mm	1800 mm	1800 mm	2000 mm	2200 mm	2250 mm
Weight	1500 Kg	2000 Kg	2250 Kg	2800 Kg	3000 Kg	3600 Kg
Gearbox	NRW	NRW	NRW	NRW	NRW	NRW
Metal Thickness	10 mm / 4 mm	12 mm / 4 mm	12 mm / 4 mm	15 mm / 5 mm	15 mm / 5 mm	15 mm / 5 mm
Blade Type	Small Blades	Big Blades	Big Blades	Big Blades	Big Blades	Big Blades
Blades Quantity	6 Pcs.	6 Pcs.	6 Pcs.	8 Pcs.	8 Pcs.	8 Pcs.
Sides Fixed Blades	2 Pcs.	2 Pcs.	2 Pcs.	2 Pcs.	2 Pcs.	2 Pcs.
Weighing System	(ITA) / Opt.	(ITA) / Opt.	(ITA) / Opt.	(ITA) / Opt.	(ITA) / Opt.	(ITA) / Opt.
LoadCell Capacity	3 x 3 Ton	3 x 3 Ton	3 x 3 Ton	3 x 4 Ton	3 x 4 Ton	3 x 4 Ton
LoadCell Quantity	3 Pieces	3 Pieces	3 Pieces	3 Pieces	3 Pieces	3 Pieces
Discharging Belt Side	Right Or Left	Right Or Left	Right Or Left	Right Or Left or Front	Right Or Left or Front	Right Or Left or Front
Discharging Belt Length	70 cm	70 cm	70 cm	80 Cm	80 Cm	80 Cm
Discharging Door Width	70 Cm	70 Cm	70 Cm	80 Cm	80 Cm	80 Cm
Second Dischar. Door	Option	Option	Option	Option	Option	Option
2. Discharging Belt	Option	Option	Option	Option	Option	Option
Wheels Quantity	2 Pieces	2 Pieces	2 Pieces	2 Pieces	2 Pieces	2 Pieces
Wheels Type	10/75/15.3	10/75/15.3	11.5/80/15.3	11.5/80/15.3	12.5/80/15.3	12.5/80/15.3
Chassis	With Chassis	With Chassis	With Chassis	With Chassis	With Chassis	With Chassis
Back Loader (Bucket)	Option	Option	Option	Option	Option	Option
Self Hydraulic Oiling	Option	Option	Option	Option	Option	Option
Hydraulic Filter	Standart	Standart	Standart	Standart	Standart	Standart
Shaft (Kardan)	Include	Include	Include	Include	Include	Include
Required Tractor Pow.	45-50 Hp	45-50 Hp	50-60 Hp	70-80 Hp	70-80 Hp	80-90 Hp




OPTIONS

- Self hydraulic option,
- Hydraulic Rear Loader Option
- Hydraulic Discharge Door Option,
- Electric Motor Option,
- Weighing System Option,
- Wire cables entering Tractor



Single & Double Vertical AUGER FEED MIXER

Electric Motor
+
Tractor PTO

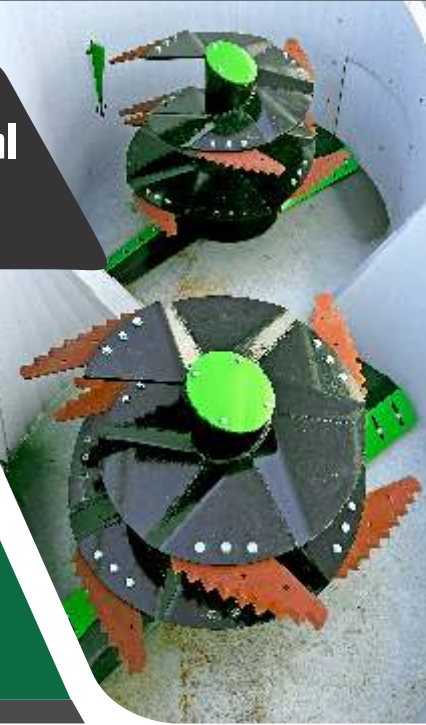

Single & Double Vertical Auger Feed Mixer Technical Properties

MODEL	AGM D12 Double Auger	AGM D14 Double Auger	AGM D16 Double Auger	AGM D18 Double Auger	AGM D20 Double Auger	AGM D22 Double Auger
Capacity	12 m ³	14 m ³	16 m ³	18 m ³	20 m ³	22 m ³
Length	5500 mm	5600 mm	5800 mm	6000 mm	6300 mm	6500 mm
Height	2500 mm	2700 mm	2600 mm	2600 mm	2600 mm	2600 mm
Width	2300 mm	2300 mm	2300 mm	2300 mm	2300 mm	2300 mm
Weight	4200 Kg	4600 Kg	5000 Kg	5300 Kg	5500 Kg	5700 Kg
Gearbox	NRW (Ger)	NRW (Ger)	NRW (Ger)	NRW (Ger)	NRW (Ger)	NRW (Ger)
Metal Tickness	18 mm / 6 mm	18 mm / 6 mm	20 mm / 8 mm	20 mm / 8 mm	20 mm / 8 mm	20 mm / 8 mm
Blade Type	Big Blades	Big Blades	Big Blades	Big Blades	Big Blades	Big Blades
Blades Quantity	16 Pcs.	16 Pcs.	16 Pcs.	16 Pcs.	16 Pcs.	16 Pcs.
Sides Fixed Blades	4 Pcs.	4 Pcs.	4 Pcs.	4 Pcs.	4 Pcs.	4 Pcs.
Weighing System	LC (ITA) / Opt.	LC (ITA) / Opt.	LC (ITA) / Opt.	LC (ITA) / Opt.	LC (ITA) / Opt.	LC (ITA) / Opt.
LoadCell Type And Capacity	LC-4F / 4 Ton	LC-4F / 4 Ton	LC-4F / 4 Ton	LC-4F / 4 Ton	LC-6LR / 6 Ton	LC-6LR / 6 Ton
LoadCell Quantity	3 Pieces	3 Pieces	4 Pieces	4 Pieces	4 Pieces	4 Pieces
Discharging Belt Side	Right Or Left or Rear/Front	Right Or Left or Rear/Front	Right Or Left or Rear/Front	Right Or Left or Rear/Front	Right Or Left or Rear/Front	Right Or Left or Rear/Front
Discharging Belt Length Option By (cm)	50 - 70 - 100 - 200	50 - 70 - 100 - 200	50 - 70 - 100 - 200	50 - 70 - 100 - 200	50 - 70 - 100 - 200	50 - 70 - 100 - 200
Discharging Door Width	80 Cm	80 Cm	80 Cm	80 Cm	80 Cm	80 Cm
Second Dischar. Door	Option	Option	Option	Option	Option	Option
Discharging Belt (Second)	Option	Option	Option	Option	Option	Option
Wheels Quantity	2 Pieces	2 Pieces	2 Pieces	2 Pieces	2 Pieces	2 Pieces
Wheels Type	400 / 60 - 15.5	400 / 60 - 15.5	400 / 60 - 15.5	500/50-17	500/50-17	400 / 60 - 15.5
Chassis	High Chassis	High Chassis	High Chassis	High Chassis	High Chassis	High Chassis
Back Loader (Bucket)	Option	Option	Option	Option	Option	Option
Self Hydraulic Oiling System	Option	Option	Option	Option	Option	Option
Hydraulic Filter	Standart	Standart	Standart	Standart	Standart	Standart
Shaft (Kardan)	Include	Include	Include	Include	Include	Include
Electric Converter (Inverter)	Option	Option	Option	Option	Option	Option



OPTIONS

- Self hydraulic option,
- Hydraulic Rear Loader Option
- Hydraulic Discharge Door Option,
- Electric Motor Option,
- Weighing System Option,
- Wire cables entering Tractor




Stationary Vertical AUGER FEED MIXER

Electric Motor



Stationary Vertical Auger Feed Mixer Technical Properties

MODEL	AGM16	AGM20	AGM30	AGM40	AGM50
Capacity	16 m ³	20 m ³	30 m ³	40 m ³	50 m ³
Lenght	6000 mm	6000 mm	6000 mm	8000 mm	8000 mm
Height	3000 mm	3400 mm	3600 mm	3600 mm	4000 mm
Width	2400 mm	2400 mm	2400 mm	2400 mm	2400 mm
Weight	5400 Kg	5800 Kg	7600 Kg	11200 Kg	12000 Kg
Auger quantity	2 Pcs.	2 Pcs.	2 Pcs.	3 Pcs.	3 Pcs.
Electric Motors	2 x 30 Kw	2 x 37.5 Kw	2 x 45 Kw	3 x 45 Kw	3 x 45 Kw
Gearbox	NRW (Ger)	NRW (Ger)	NRW (Ger)	NRW (Ger)	NRW (Ger)
Metal Tickness	18 mm/6 mm	20 mm/6 mm	22 mm/8mm	22 mm/8mm	22 mm/8mm
Blade Type	Big Blades	Big Blades	Big Blades	Big Blades	Big Blades
Blades Quantity	16 Pcs.	16 Pcs.	16 Pcs.	24 Pcs.	24 Pcs.
Sides Fixed Blades	4 Pcs.	4 Pcs.	4 Pcs.	6 Pcs.	6 Pcs.
Weghing System	LC (ITA)/Opt.	LC (ITA)/Opt.	LC (ITA)/Opt.	LC (ITA)/Opt.	LC (ITA)/Opt.
LoadCell Type And Capacity	LC1-6 F/6 Ton	LC1-6 F/6 Ton	LC1-6 F/6 Ton	LC1-6 F/6 Ton	LC1-6 F/6 Ton
LoadCell Quantity	4 Pieces	4 Pieces	4 Pieces	6 Pieces	6 Pieces
Discharging Belt Side	Side Or Rear	Side Or Rear	Side Or Rear	Side Or Rear	Side Or Rear
Discharging Belt Lenght Option	500 Cm	500 Cm	500 Cm	500 Cm	500 Cm
Discharging Door Width	80 Cm	80 Cm	80 Cm	80 Cm	80 Cm
Second Dischar. Door	Option	Option	Option	Option	Option
Chassis	On feet	On feet	On feet	On feet	On feet
Self Hydraulic Oiling System	Standart	Standart	Standart	Standart	Standart
Electric Panel	Include	Include	Include	Include	Include
Electric Converter Frequency	Option	Option	Option	Option	Option

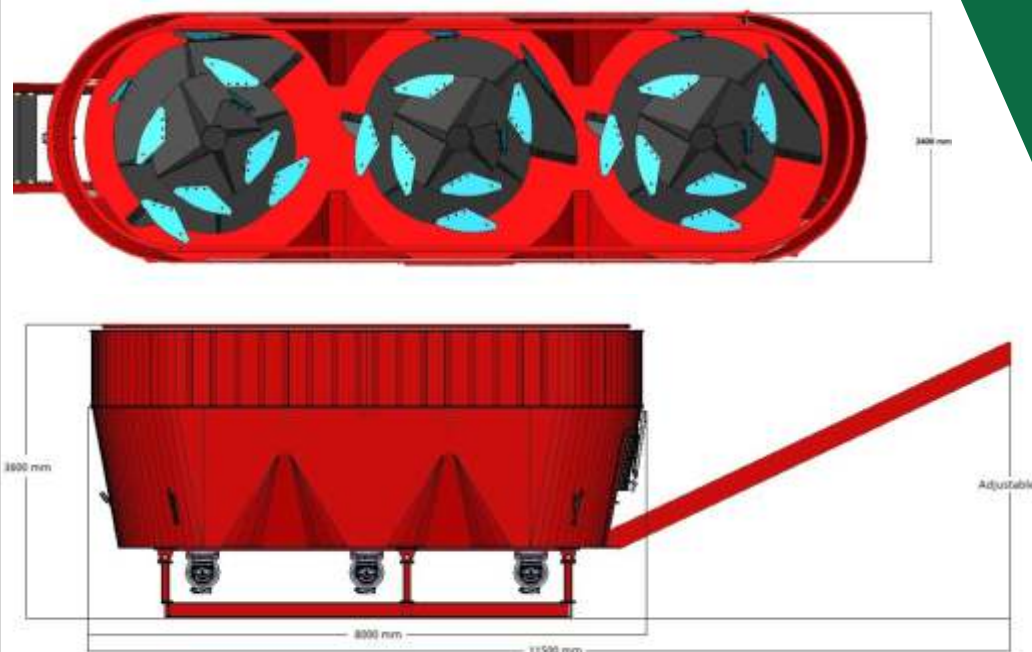

Agrimono Tar. Mak. İth. İhr. San. Ve Tic. Ltd. Sti.



agrimono@gmail.com



+90 537 291 22 33



Duatepe Mah. Küçük Sanayi Sitesi
E Blok No:10/21 Tire - İzmir / TÜRKİYE



agrimono.com